



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04J 13/00	A2	(11) International Publication Number: WO 00/44117 (43) International Publication Date: 27 July 2000 (27.07.00)
(21) International Application Number: PCT/US00/00482 (22) International Filing Date: 18 January 2000 (18.01.00) (30) Priority Data: 09/236,083 25 January 1999 (25.01.99) US (71) Applicant: ERICSSON, INC. [US/US]; 7001 Development Drive, Research Triangle Park, NC 27709 (US). (72) Inventor: DENT, Paul, W.; 637 Eaglepoint Road, Pittsboro, NC 27312 (US). (74) Agent: DUBOIS, Steven, M.; Burns, Doane, Swecker & Mathis L.L.P., P.O. Box 1404, Alexandria, VA 22313-1404 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: MULTI-STAGE CDMA SYNCHRONIZATION WITH PARALLEL EXECUTION		
(57) Abstract		
<p>Methods and systems for time synchronizing a receiver to a spread spectrum signal are described. Exemplary embodiments of the present invention provide for at least a two step process in which, at a first step, a number of candidate synchronization frequencies or timings are identified, followed by confirming one of the candidates as a correct synchronization state at a second or final step. According to the present invention, the confirmation step may be performed at the same time as the step of identifying further candidates by processing the same received signal samples in different ways.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

MULTI-STAGE CDMA SYNCHRONIZATION WITH PARALLEL EXECUTION

BACKGROUND

5 The present invention relates to mobile phones or radio apparatus for receiving spread spectrum signals, such as code division multiple access (CDMA) signals, with which time synchronization is achieved.

Radiocommunication systems involve the transmission of information over an air interface, for example by modulating a carrier frequency with that information.

10 Upon reception, a receiver attempts to accurately extract the information from the received signal by performing an appropriate demodulation technique. However, in order to demodulate a received signal, it is first necessary to synchronize timing between the transmitter and the receiver. Different levels of synchronization may be required depending upon the design of the radiocommunication system. For example,
15 in most systems clocking differences between the transmitter and the receiver create differences in timing at a bit level. Moreover, in some radiocommunication systems, information is transmitted in bursts, sometimes referred to as "frames", which represent chunks of information that are independently detected and decoded. In these types of systems it is also desirable to locate the beginning of a frame, so that information
20 relevant to a particular receiver is isolated and demodulated. Likewise, some systems (e.g., time division multiple access or TDMA systems) further subdivide frames into timeslots to create channels that are time multiplexed with one another. In these systems it is further desirable to synchronize the receiver to the beginning of each timeslot.

25 Some systems provide channelization using a spread spectrum technique known as code division multiple access (CDMA). In CDMA systems, the information data stream to be transmitted is first coded or spread using a unique spreading code and then combined with a long PN-sequence or a shorter scrambling-sequence. In the latter case, the scrambling-sequences are planned from cell to cell so that neighboring cells
30 use different scrambling-sequences or scrambling-masks. The information data stream

-2-

and the PN-sequence or the scrambling sequence can have the same or different bit rates. The multiplication of the information data stream with the unique spreading code and long PN-sequence results in an output stream of chips. Thus, in CDMA systems, it is also desirable to synchronize the receiver to the chip boundaries.

5 To further understand the synchronization tasks associated with signal processing in a CDMA radiocommunication system, consider the following example. FIG. 1 illustrates the use of base stations to transmit radio waves to mobile users (mobile stations) in a cellular system. In a CDMA system, base station 10 can transmit signals to mobile stations 14 and 15 as a single (composite) signal. The signal directed
10 to mobile station 14 is typically coded with a short code that is orthogonal or mostly orthogonal to a short code that is used to code the signal directed to mobile station 15. These signals are then spread with a second code that is sometimes referred to as a long code, associated with base station 10. The sum of the two coded and spread signals is then transmitted by base station 10.

15 When mobile station 14 receives the composite signal, mobile station 14 multiplies the spread signal with the long code and the short code to recreate the signal directed to mobile station 14 and the signal directed to mobile station 15 is suppressed as interference noise. Similarly, mobile station 15 multiplies the spread signal with the long code and the short code assigned to mobile station 15 to recreate the signal
20 directed to mobile station 15 and the signal directed to mobile station 14 is suppressed as interference noise. The receivers associated with mobile stations 14 and 15 must have acquired the various levels of synchronization to the received signal which were described above, in addition to learning or knowing the applicable long and short codes, in order to implement despreading, demodulation and decoding of the information
25 residing in that signal. Many different techniques have been developed in order to acquire synchronization at each of the various levels. For frame synchronization these techniques typically depend, in large degree, on the frame structure and the manner in which overhead or control information is conveyed to the mobile station. Overhead information is usually provided on one or more broadcast control channels which are
30 transmitted by base stations using known channels to which mobile stations can quickly

-3-

lock onto and receive the overhead information including, among other things, information used to acquire frame synchronization with that base station. Those skilled in the art will appreciate that many radiocommunication systems have unsynchronized base stations, i.e., base stations which do not share a common timing reference signal.

5 Accordingly, frame synchronization is a process which needs to be performed, for example, at start-up (i.e., when a mobile is powered on), as a mobile station moves from cell to cell and when measuring on channels associated with neighboring cells as part of cell reselection procedures (e.g., to confirm that a mobile station is listening to a "best" serving base station).

10 Of course, as with most signal processing tasks performed by the receiver, reducing the delay associated with synchronization is important in improving the receiver's performance. Many types of communication services, in particular speech communication, are relatively delay intolerant. Thus, system designers are continuously seeking for ways in which to reduce the amount of time that it takes to
15 perform any given signal processing task, including time synchronization.

SUMMARY

A radio receiver employing a synchronization method according to the present invention is able more rapidly to find and acquire synchronisation with a CDMA signal
20 by means of at least a two step process in which, at a first step, a number of candidate synchronisation frequencies or timings are identified, followed by confirming one of the candidates as a correct synchronisation state at a second or final step. According to the present invention, the confirmation step may be performed at the same time as the step of identifying further candidates by processing the same received signal samples in
25 different ways.

In an exemplary implementation, a first correlation means correlates shifts of a stream of received signal samples using a correlation length over which the received signal does not drift significantly in phase, amplitude or timing, thus allowing coherent correlation. Coherent correlations are not in general expected to reach a sufficient
30 signal-to-noise ratio to unambiguously identify with adequate certainty that correct

-4-

synchronisation has been achieved. Consequently a number of coherent correlations corresponding to like timing postulates are further accumulated non-coherently in a number of bins, each bin corresponding to a timing postulate. Non-coherent accumulation involves adding the magnitudes or square magnitudes of the coherent correlations, where the squared magnitude is equal to the sum of the squares of the real and imaginary parts of the coherent correlation value.

When non-coherent or magnitude accumulation must take place for a prolonged time period in order to identify a likely candidate timing, and the time period is so long that a drift of timing may occur that is of the order of plus or minus one timing bin width or more, the present invention may employ a drift compensation type of accumulation described in U.S. Patent Application Serial number 08/768,975 to Paul W. Dent, filed 18 Dec 1996, the disclosure of which is hereby incorporated by reference herein.

An exemplary CDMA system according to the present invention, using a 4 megachip per second modulation, searches time bins that are one chip wide, i.e. 0.25US. The receiver time and frequency reference has an initial error of ± 10 parts per million, which results in a drift of one bin per 25mS. This exemplary CDMA system furthermore transmits a known chip pattern every 0.625mS for use by the receiver to achieve a first synchronization step. The known chip pattern has a length of 256 chips for example. With 10ppm frequency error, the maximum coherent correlation length is restricted to about 64 chips. Therefore four, 64-chip coherent correlations are accumulated non-coherently every 0.625mS to determine a correlation value with the known 256-chip pattern. Approximately 40 of these 0.625mS correlations may then be accumulated non-coherently, after which the timing may have drifted one chip. To compensate for such drift, after a number of non-coherent accumulations less than 40, for example 16, the results for each bin are accumulated with the best of previous cumulative results lying within ± 1 bin, thus allowing a drift of ± 1 bin in 16 while still providing continued accumulation. In the above exemplary system, the number of timing bins is approximately $0.625\text{mS} \times 4\text{megachips/sec}$, that is about 2500 bins of one-chip width.

-5-

Drift-compensated accumulation continues according to the present invention until a cumulative results bin reaches a threshold. This indicates that the known signal pattern may have been found at the timing corresponding to the threshold. The timing associated with that bin is then recorded in a list of candidate timings to be further
5 evaluated, and the bin contents reset to zero. Drift compensated accumulation of correlations with the known signal pattern then continues and as further bins reach the first threshold, their associated timings are also entered into the list and their bin contents reset to zero. Eventually, a bin already reset to zero at least once may again reach the threshold value and would then be entered into the list a second time. The list
10 thus contains candidate timings in the order in which they reached the first correlation threshold, including possible repeats of an earlier candidate timing. Drift-compensated accumulation in timing bins can comprise subtracting the minimum value over all bins from all the bins, so as to emphasize differences between the bin values and prevent indefinite growth of numerical values. Detecting that a bin value reaches a threshold
15 can then imply detecting that a bin value has exceeded the other bin values by a threshold.

In the exemplary CDMA system, many signals may be transmitted in the same bandwidth at the same time using different spreading codes, preferably orthogonal codes. In addition to the above-mentioned known signal pattern, which typically uses
20 the same code, regardless of the transmitter, a second signal pattern is transmitted that is selected to be different for different transmitters in an adjacent group of transmitters. The second signal pattern being one of a limited number of, for example, 16 predetermined patterns. A second stage of synchronisation therefore consists of determining if one of the second known signal patterns can be found at a timing shift
25 recorded in the candidate list derived in the first step described above. Because the second known signal pattern is transmitted at the same time and on the same frequency as the first known signal pattern, they are both received overlapping at the receiver and correlations may be performed using the second known symbol pattern by a second correlation means simultaneously with continuing to perform and accumulate
30 correlations with the first known signal pattern using the first correlation means. The

-6-

invention of Dent and Wang described in U.S. Patent Application Serial Number 08/967,444, entitled "Efficient Correlation Over a Sliding Window" (filed November 11, 1997) may, for example, advantageously be employed to combine the first and second correlation means taking advantage of common computations to reduce effort and therefore power consumption.

Correlations are performed with all 16 of the second known signal patterns, but using only that timing shift identified with the first candidate in the list. According to a second aspect of the present invention, correlations with the first known signal pattern may also be used to estimate a frequency error, which is also stored in the list against candidate timings. When using a candidate timing to test for correlations with the 16 second known signal patterns, the frequency error estimate may be used to compensate the received signal for phase drift, allowing a longer coherent second correlation to be performed. When one of the 16 second correlations has reached a second threshold, the timing, frequency error estimate and the second known symbol pattern giving that correlation may be recorded in a second list of candidates to be tested in an optional third synchronization step. The present invention can optionally comprise performing simultaneous correlations with the second known symbol patterns using more than one of the timings from the candidate list in parallel. The results would be accumulated in $16N$ bins, where N is the number of simultaneously tested candidates. When any one of the $16N$ correlations reaches the second threshold, the associated second known code, timing and frequency error are transferred to the second list. The second list thus contains second correlations in the order in which their accumulations first reached the second threshold.

In the exemplary system, the second known symbol pattern identifies a group of third known symbol patterns, one of which should be found in a third correlation step. The present invention may be applied again to search simultaneously for a third correlation while continuing first and second correlation accumulations. The third correlation is performed using all known symbol patterns in the group, which once again may, for example, contain 16 members. When a third correlation is identified, the method has thus disambiguated which of 256 different signal waveforms are in use,

-7-

i.e. the CDMA spreading code used by the transmitter has been narrowed down to one candidate. Using that code, an attempt is then made to decode a broadcast control channel emitted by the transmitter, successful decoding being indicated, for example, by a Cyclic Redundancy Check Code (CRC). This final step confirms that a valid signal has been identified and synchronisation achieved.

A further uncertainty that is resolved by the method is which of a number of frequency channels the transmitter is using. This is done by applying the method sequentially to all possible frequency channels selected intelligently in a priority order. For example, a frequency channel on which sync was previously found most recently can be tested first. Moreover, sync search on any frequency channel may be abandoned at any stage if the correlation accumulation for that stage fails to reach the threshold for that stage in a given time.

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, advantages and other aspects of the present invention will be more readily understood upon reading the following detailed description in conjunction with the figures, wherein:

Figure 1 illustrates an exemplary CDMA radiocommunication system in which the present invention may be employed;

Figures 2(a)-2(d) depict a flowchart which is used to described exemplary methods and systems for performing synchronization according to exemplary embodiments of the present invention; and

Figure 3 shows a CDMA signal format to which the present invention may be applied.

DETAILED DESCRIPTION

In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular circuits, circuit components, techniques, etc. in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced in

-8-

other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods, devices, and circuits are omitted so as not to obscure the description of the present invention.

5 In Figure 2(a), a radio receiver, such as a mobile phone, performs a scan of the allocated frequency band in step 1 upon first being switched on after a period of inactivity. The frequency scan step identifies channels on which RF energy is detected and can measure the signal strength of detected RF energy. In step 2, other information is used to determine a prioritized list of channels that will be searched in order. In the
10 absence of other information, the prioritized order can be signal strength order from strongest to weakest. Other information that can change this order would, for example, include knowledge of channels on which valid signals had been found before.

For example, if the signal strength now received on a channel on which sync was established most recently is similar to that measured when valid synchronisation was last achieved on that channel, it may be given highest priority. If the most recent
15 sync channel does not have the highest signal strength, but the signal strength on a different channel on which sync is often established is high, then the different channel may be given priority. Another example of other information which may affect the scanning order is a list of channels on which sync has never been established or never been established even when signal strength is high (because, for example, they might be
20 allocated to a different type of system). These channels may be given lower priority than their measured signal strength would otherwise indicate. Another reason why channels may be given low priority is when receiver frequency step sizes are narrower than the system's channel spacing. For example, receiver resolution could be 200KHz while a particular system places signals centered only on every 25th 200KHz step. A
25 radio receiver could learn on which of the 25 steps sync is most often achieved and give those higher priority for searching than the other 24, depending of course on whether the scan for energy confirms the likelihood that these steps are still those to use. All such logic can be used in step 2 to establish a prioritized frequency channel list.

In step 3, the receiver tunes to the next channel in the list, which is the first
30 channel on the first pass through the flow chart. In step 4, the signal received on the

-9-

tuned channel is processed using, for example, a correlator or matched filter matched to a known code. Exemplary matched filter structures are disclosed in U.S. Patent Applications Serial No. 08/967,444, filed November 11, 1997 (Ericsson Docket #PO 8668) to Dent and Wang entitled "Efficient Correlation Over a Sliding Window" as described *supra*, which is hereby incorporated by reference herein. These inventive correlation techniques allow received signal samples to be correlated with a known code with all possible timing shifts between the known code and the signal samples being correlated simultaneously.

Moreover, correlations can be performed using more than one code simultaneously with less than a commensurate increase in effort. Using these inventive correlators or matched filters, the savings in effort increases, the greater the number of correlations that have to be calculated. This property will prove useful in the current invention which performs synchronisation in several stages using different codes, with all stages running in parallel.

The correlations computed in step 4 for different timing shifts between the received signal and the known code are accumulated with like values computed from a repetition of the same signal at periodic intervals. Such a signal format is shown in Figure 3. A CDMA signal waveform allows several different signals to overlap in time and frequency by the use of different codes, which permit a receiver to separate the overlapping signals. In Figure 3, three types of signal are shown overlapping;

- (1) a Traffic Channel, which is divided into 10mS frame periods which are further subdivided into 16, 0.625mS timeslots;
- (2) a Paging channel, which has the same frame and slot structure as the Traffic channel, although it may be of a different power level, and with other differences in the finer structure. One such difference is that the paging channel slots are divided into ten, 256-chip symbols, nine of which use a code unique to a particular transmitter selected from a set of 256 codes while the tenth symbol uses one of a subset of 16 codes and is called the second Periodic Channel or PERCH 2; and

-10-

- (3) a first Periodic Channel (PERCH 1) which comprises bursts of 256 chips using a code which is common to all transmitters. Moreover, the PERCH 1 bursts are aligned in time with the PERCH 2 occurrences on the Paging Channel.

5 Optionally, one of the PERCH 1 or PERCH 2 occurrences may occasionally at regular intervals be an "unmodulated burst", such as would be achieved by setting all 256 chips to the same value, or systematically phase-rotating value, the latter giving a frequency-offset CW burst. These CW bursts can be useful in providing the receiver with an opportunity to obtain coarse time and frequency synchronisation before
10 beginning step 4 of Figure 2(a).

 Techniques for utilizing such CW bursts in the context of TDMA signals (but not overlapping CDMA signals) are known from the European Digital Cellular System called GSM and, therefore are not elaborated here. The current description however continues without reference to whether coarse synchronisation is achieved with the aid
15 of CW bursts or not. Instead, the most onerous case is assumed, i.e., in which the frequency and time uncertainty over which the sync search is performed is not reduced. Consequently, in accordance with the exemplary waveform of Figure 3, correlation with the PERCH 1 code can be found at any one of the 2560-chip shifts over the one-slot repetition period of the code.

20 It is also assumed that one 256-chip correlation will not yield an adequate YES/NO detection decision. An aim of the present invention is to permit a receiver to acquire time and frequency synchronisation even when the signal strength is too low to establish a normal traffic channel, such as when a mobile phone user is deep inside a building. The aim of future cellular systems will be to provide a high-penetration
25 method of alerting the phone that it is being called even in such disadvantaged circumstances, and conveying a short message, such as the caller-ID using highly redundant signaling. However, even using such highly redundant signaling, synchronisation must first be established in order to decode the signal.

 In order to improve the synchronisation robustness, corresponding correlations
30 from corresponding timings in successive slots are accumulated in step 5. Since the

-11-

timing uncertainty is 2560 chips in this example, 2560 timing bins are used to accumulate correlations corresponding to each particular timing postulate.

5 A correlation between a complex radio signal and a given code yields a complex number having an amplitude and a phase. The phase remains constant only over a limited time due to fading or frequency error. In an exemplary 2GHz radio system fading rates would allow correlations of length 256-chips or more to be made, but the result would exhibit a different phase angle from slot to slot due to the fading changing the signal phase over the 0.625mS slot separation time. Consequently, only the magnitudes or magnitudes squared of the correlations are accumulated from slot-to-slot, 10 which is termed "non-coherent" accumulation in the art.

However, frequency error in the receiver due to the use of a low cost oscillator can restrict the coherency time to less than 256 chips. In an exemplary embodiment, the coherent correlation length (matched filter length) is only 64 chips to allow for frequency error; four 64-chip correlations then have their magnitudes accumulated non-coherently to form a 256-chip correlation at step 4. Optionally, the four 64-chip 15 correlations can be further processed to estimate a frequency error, as further elaborated later. If and when an opportunity arises to correct the oscillator's error, a note can be made of that and subsequent 256-chip correlations can be coherent correlations.

20 For example, the oscillator can be calibrated whenever synchronisation is confirmed with a valid transmitter and a note recorded against the temperature at which calibration was made. Subsequent sync searches made at temperatures for which the oscillator has been calibrated can use 256-chip correlation while at other temperatures 64-chip coherent correlations would be made.

25 At step 5, coherent or non-coherent correlations from step 4 are accumulated in the 2560 timing bins. If accumulation continues too long, frequency error in the receiver's chip rate relative to the transmitter's chip rate can cause a drift in the correspondence of timing bins to a particular timing. This problem was solved by the disclosure of U.S. Patent Application Serial No. 08/768,975 to Dent, filed December 30 18, 1996 which is hereby incorporated by reference herein. In the above application,

-12-

drift is compensated by accumulating the largest of three adjacent previous cumulative values with a new correlation, thus allowing a timing drift of +/- one bin. In the exemplary system, the frequency error is much smaller than that which would cause a drift of one chip per 2560 chips. A +/-10ppm frequency error will rather cause a 1
5 chip error in 100000 chips, or 40 slots of 2560 chips. Consequently, accumulation of corresponding values can take place in corresponding bins for up to 40 slots, and then the 2560, 40-slot, block-cumulative values are accumulated with the 2560 cumulative bins using drift compensation according to the incorporated patent application. The need for 2 x 2560 memories can be avoided, by first processing the previous,
10 cumulative bin values to determine the largest value in every adjacent group of three bins. The bin values are then replaced by this largest of three. Then each new correlation value for the next 40 slots is accumulated in a corresponding one of the replaced bins. After 40 slots, the "best-of-3" operation is repeated prior to continuing. In practice, the exemplary system performs the "best-of-3" operation every 16 slots,
15 corresponding to the exemplary 10mS frame period of Figure 3. In this way, cumulative correlation can continue indefinitely until something is detected, thus solving the "high-penetration sync" aim.

Even in the absence of a signal however, non-coherent accumulation of correlation magnitudes results in numerically growing values due to noise. To prevent
20 indefinite numerical growth, it is useful to subtract the smallest value over all 256 bins from all the values, one bin then being zero and the non-zero bins indicating the margin by which they exceed the "noise" value. This differential value is in fact more useful for detecting the presence of a signal. A predetermined threshold can be established against which the differential bin values are compared. If a bin value exceeds this
25 threshold, it indicates that correlation with the associated timing value exceeded correlation with all other chip-shifts by a significant margin, indicating the likelihood, if not the certainty, that a signal exists with that timing.

One reason why certainty of detection does not exist with a single-stage sync detection algorithm is that the propagation path from a transmitter to a receiver can
30 comprise many paths with different delays separated in time by one or more chips.

-13-

Therefore each timing bin only accumulates that fraction of the energy received in a single ray; moreover multiple rays lead to multiple bins exhibiting correlations, so that there is uncertainty in which one to believe. The preferred algorithm is to continue drift-compensated accumulation of differential bin values until one bin value becomes the first to exceed the first detection threshold, as detected at step 6. If no bin exceeds the threshold after an accumulation cycle, at step 7 the receiver compares the time spent accumulating correlations on this frequency channel with a timeout limit. If the time limit is exceeded, further search is deemed useless and a return is made to step 3 to try tuning the next frequency channel in the list. The timeout limit can be adjusted in dependence on the measured signal strength values on the channel, so that a longer search time is allowed when the channel is weak. If all channels are weak, as measured at step 1, it can be an indication that the user is deep indoors and a much longer timeout used. Moreover, a different prioritization of the frequency channels to search can be employed if it is suspected that a "high-penetration" sync search must be performed.

If a bin exceeds the first detect threshold at step 6, step 8 of Figure 2(b) is entered. At step 8 of Figure 2(b), the just detected bin value is reset to zero and the timing (and optionally any frequency error that has been estimated during correlation) for that bin, i.e. the bin number, is recorded in a second list as a "candidate" or "possible" signal. Correlations then continue to be made and accumulated according to the method shown in Figure 2(a), except that changing frequency channel due to timeout is inhibited as long as the second list is not empty. Maintaining the same tuned frequency permits techniques according to the present invention to attempt a second stage of synchronisation on the channel on which first stage sync is detected. Although the inventive correlator of the above-incorporated applications can perform correlations of the same received signal samples with many different codes and code-shifts simultaneously, the receiver cannot receive signal samples on two or more different frequency channels simultaneously, and so the choice of channel is frozen during performance of second stage of synchronization illustrated in Figure 2(b).

In Figure 2(b), the received signal is correlated at step 9 with each of 16 possible PERCH 2,256-chip codes. If coarse frequency error has been supplied from

-14-

stage 1 sync detection, these 256-chip correlations may be coherent correlations. It will be explained later how the factor of four reduction in frequency error needed to increase the coherent correlation length from 64 to 256 chips is implemented.

5 The timing having been supplied from stage 1 sync, the timing uncertainty to be searched using the technique in Figure 2(b) is limited. For example, if the multipath delay spread is a maximum of 16 microseconds, only 64 timing bins are needed. However, there are 16 different codes, and 64 timing bins are needed for each, making 1024 bins altogether. At step 10, correlations are accumulated in bins corresponding to one of 16 codes and one of 64 timings for all candidates in the second list, thus there
10 are multiple banks of 1024 bins required in the case of multiple candidates to be tested. Ultimately, the number of simultaneously processed candidates can be limited by the amount of memory. Candidates in the list that cannot be processed for lack of memory may be processed later after a previous candidate has been rejected at step 13.

Drift compensation may be applied as before using a "best of 3" operation every
15 10mS frame. However, subtraction of the minimum value of these bins from all of them is not necessarily a good idea, as the timing has been so restricted that all timings and codes could conceivably contain valid signal energy arriving from more than one nearby base station transmitter. Therefore the minimum bin value from the bins of Figure 2(a) can be used as a noise floor and subtracted from all the bins of Figure 2(b)
20 as well as all the bins of Figure 2(a). If any bin value in Figure 2(b) is then detected at step 11 to have exceeded this noise floor by more than a second threshold, step 14 is entered in figure 4. On the other hand, if no bin exceeds the second threshold, a test is made at step 12 to determine if enough time has been spent testing any of the timings in the second list. If so, the timing that has been tested for longer than the timeout period
25 is deleted from the list. When all timings have been deleted from the list, the frequency channel change steps 7, 8 of Figure 2(a) may be re-enabled.

Referring now to Figure 2(c), step 14 is entered with a timing value and code giving a second threshold detection at step 11. This is recorded in a third list, allowing again for multiple candidates. The PERCH 2 code detected at step 11 indicates one of
30 16 groups of codes, each group containing 16 codes, that the transmitter may be using

-15-

for coding the other nine symbols per slot of the paging channel. Consequently correlations are now performed using the timing and coarse frequency error from previous steps with the nine other paging channel symbols using each of the 16 codes in the indicated group. These are accumulated as before in a limited number of timing bins times the 16 code bins. When one of these third banks of bins is detected at step 5 17 to exceed a third threshold above the noise floor, the code used by the transmitter is uniquely suggested and is conveyed to a fourth list at step 20 of Figure 2(d) for confirmation. It may be seen that Figure 2(c) operates similarly to Figure 2(b) and so will not be elaborated further. A person skilled in the art will realize that the operations of flow charts of Figures 2(a)-2(d) can be controlled by a microprocessor 10 (not shown) using a suitable software program, and that software programs that are identical apart from the data memory elements they operate on do not need to be stored in multiple copies, but can be given the property of re-entrancy that allows a single program to be multiply active in different states and quasi-simultaneously to process 15 different data and even in different ways controlled by different parameters.

Now referring to Figure 2(d), step 20 is entered having identified one of in total 256 codes that the detected transmitter is thought to be using to code the paging channel signal. It may be that more than one candidate code has been detected, for example due to the mobile station being within range of more than one base station transmitter using 20 the same frequency channel. Therefore the just-identified signal parameters are entered into a fourth list with any other codes, timings and frequency errors already in the list. At step 21 an attempt is made to decode the signal at the top of the list. If the signal is a CDMA signal, a RAKE receiver (not shown) may be appropriate to perform this decoding step. The RAKE receiver first performs correlations with known codes based 25 on the identified unique code of this transmitter to establish the phase and amplitudes (i.e. complex channel parameters) of each significant multipath ray reaching the receiver. The RAKE receiver then uses the code in correlation with unknown data symbols using the timing shifts of the established significant rays. The results of correlation with unknown data symbols are combined using weighting factors based on 30 the established complex channel parameters for each ray. The combined value is then

-16-

submitted as a "soft decision" to an error correction decoding algorithm to decode information transmitted on the paging channel. More details of RAKE receivers may be found in U.S. Patents Nos. 5,305,349 and 5,572,552 to Applicant which are hereby incorporated by reference herein.

5 After error correction decoding of the signal at step 21, a test for correct decoding is made at step 22. This can be done for example with the aid of a Cyclic Redundancy Check (CRC) code. If the CRC code does not check, this may be an indication that the signal in the fourth list was a false signal or of low signal quality. Rejection of the signal and deletion from the fourth list may occur as a result of several
10 successive failures of the CRC check. As with all the steps of Figure 2(a)-2(d) presented here, attempted decoding of one, any or all of the signals with parameters recorded in the fourth list can in principle be done simultaneously, and while the earlier synchronisation detection stages are also still proceeding. In this context "simultaneously" means processing the same received signal in many different ways
15 corresponding to searching for a PERCH 1 burst, a PERCH 2 burst or CRC check using different despreading codes. The term "simultaneously" does not necessarily imply multiple copies of decoding hardware, as sufficiently fast hardware can be time-shared, i.e. operated sequentially, to process the same stored data in many different ways. The amount of parallelism provided in the hardware to obtain the desired
20 processing ability is a design trade-off that is not material to the inventive principles disclosed above.

 Using the invention, a multi-stage synchronisation process is implemented with the aim of reducing the time needed to acquire synchronisation with a signal such as a spread-spectrum signal. The first stage of the sync process is designed to speed
25 detection of any signal, by limiting the number of codes used for the first detection stage and accepting a higher probability of false alarms. Later stages of synchronisation are performed using only the limited number of candidate signals defined by the parameters identified in the earlier stage, and aim to successively limit the number of signal candidates retained for further testing while improving the confidence that a
30 retained signal is a true signal. The final step of successfully decoding a paging channel

-17-

broadcast confirms detection of a true signal. When a true signal is detected and decoded, further information may be read by the receiver regarding surrounding stations, frequencies and other parameters of the network. The receiver may also measure its frequency error relative to a true signal and store a frequency calibration value for the prevailing temperature, in order to learn a frequency/temperature correction table for its reference oscillator with which to accelerate synchronisation on future occasions.

When initially a receiver has no preexisting frequency/temperature calibration table, coherent correlation lengths may be restricted, as described above. Coherent correlations of limited length have to be combined or accumulated non-coherently to produce correlations over longer periods. This can be accomplished using non-coherent accumulation or combination devices to compute the magnitude (or magnitude squared) of a complex correlation value and combine the magnitudes. Non-coherent correlation will always produce a positive result that grows with time, and is therefore more liable to falsely exceed a detect threshold than a coherent correlation. Consequently it is of interest to estimate frequency error from a preceding, non-coherent stage of correlation (e.g. that of Figure 1(a)) in order to permit a subsequent stage of correlation to be performed coherently by compensating for the estimated frequency error (e.g. the stage described by Figure 2(b)).

In the exemplary system, the synchronization codes transmitted are of length 256 while the maximum coherent correlation length imposed by frequency error is 64. To permit the full coherent correlation length of 256 to be used, it is therefore necessary to reduce the frequency error by a factor of four. This may be done in the following exemplary manner.

In Figure 2a), 64-point correlations are computed for four, successive 64-symbol blocks over a 256-symbol block. Denoting these by the complex numbers

$$I1 + jQ1$$

$$I2 + jQ2$$

$$I3 + jQ3$$

$$I4 + jQ4,$$

and

-18-

non-coherent combination of these would normally comprise computing
 $\text{SQRT}(I_1^2 + Q_1^2) + \text{SQRT}(I_2^2 + Q_2^2) + \text{SQRT}(I_3^2 + Q_3^2) + \text{SQRT}(I_4^2 + Q_4^2)$
 or alternatively the sum-of-squares
 $I_1^2 + Q_1^2 + I_2^2 + Q_2^2 + I_3^2 + Q_3^2 + I_4^2 + Q_4^2$

5 Coherent combination, if the frequency error was zero, would comprise computing

$$(I_1 + I_2 + I_3 + I_4) + j(Q_1 + Q_2 + Q_3 + Q_4).$$

Consider now a frequency error that gives rise to a 90 degree phase rotation over each 64-symbol correlation interval, equivalent to a multiplication by "j" for a
 10 positive frequency error or by -j for a negative frequency error.

Then, for positive frequency error the correlations would correspond to

$$I_1 + jQ_1$$

$$jI_2 - Q_2 \quad (\text{having been multiplied by } j)$$

$$-I_3 - jQ_3 \quad (\text{having been multiplied by } j^2)$$

15 and $-jI_4 + Q_4 \quad (\text{having been multiplied by } j^3)$

The sum of the real parts is then $I_1 - Q_2 - I_3 + Q_4$

and the sum of imaginary parts is $Q_1 + I_2 - Q_3 - I_4$.

For negative frequency error, the corresponding combinations would be

$$I_1 + Q_2 - I_3 - Q_4 \quad \text{and} \quad Q_1 - I_2 - Q_3 - Q_4$$

20 For a frequency error, positive or negative, that gives 180 degrees phase shift per 64-symbol correlation interval, the corresponding accumulations would be

$$I_1 - I_2 + I_3 - I_4 \quad \text{and} \quad Q_1 - Q_2 + Q_3 - Q_4$$

Collecting all of the above, we obtain four different ways to accumulate four 64-symbol correlations:

- 25 1) $I_1 + I_2 + I_3 + I_4 \quad Q_1 + Q_2 + Q_3 + Q_4$ for small frequency error
 2) $I_1 - Q_2 - I_3 + Q_4 \quad Q_1 + I_2 - Q_3 - I_4$ for +90 degrees per 64 chips
 3) $I_1 + Q_2 - I_3 - Q_4 \quad Q_1 - I_2 - Q_3 + I_4$ for -90 degrees per 64 chips
 4) $I_1 - I_2 + I_3 - I_4 \quad Q_1 - Q_2 + Q_3 - Q_4$ for +/- 180 degrees per 64 chips

A person skilled in the art will recognize the above as computing a four-point
 30 FFT. If desired, the correlation results can be combined instead with phase rotations of

-19-

+/-45 degrees and +/-135 degrees instead of 0, +/-90 and +/-180 degrees to avoid the frequency error sign ambiguity of the +/-180 degree combination. This would slightly modify the transition rules for drift compensated accumulation disclosed below, but nevertheless in a manner that may be fully derived by a person of average skill in the art with the help of these teachings.

An implementation of the current invention which provides the highest performance therefore comprises accumulating four 64-symbol correlations using all four of the above formulae. Then the magnitudes of the resulting 256-chip correlations are accumulated from one signal repetition period to the next (i.e. slot-to-slot in the exemplary format of Figure 3) in a set of 4 x 2560 bins, each set of 2560 bins corresponding to one of the above frequency error assumptions.

When a bin value exceeds a detect threshold, the bin number then yields both a timing value (1-2560) and a frequency error (1-4) to use for accumulating correlations in Figure 2(b). Note that it does not matter at this stage that with frequency error (4) we cannot tell if it is positive or negative. If the accumulation of type (4) above gave largest correlation for sync detect stage 1, then it should also give correct accumulation for sync detect stage 2.

It is seen that the above provides a means to classify frequency error into one of four smaller errors of $\frac{1}{4}$ the error, as needed to allow 256-symbol coherent correlations.

It is also possible to improve drift-compensated accumulation when frequency error is detected in the above way. As described above, a bin value may be periodically replaced by the largest of three adjacent values to allow for a one-bin timing drift over the period. If a bin is replaced by the next highest numbered bin value, it is an indication that the received frequency was low relative to the receiver's frequency reference crystal oscillator and had drifted "late". Conversely, replacing a bin value by the next lower bin number indicates that the received frequency was high.

In the case of simultaneous frequency error detection using 4 x 256 bins, let the bins be numbered using two indices j, k with k ranging from 1 to 2560 and j ranging

-20-

from -1 to +3 to indicate frequency nominal ($j=0$); frequency high ($j=1$); frequency low ($j=-1$) and frequency very high or low ($j=+3$).

Now, when a bin with second index k is replaced with a value from a bin with second index $k-1$, it indicates that the receiver's frequency was low compared to the received signal. Thus, to be consistent, this should only occur for a second index j equal to -1 or +3; conversely, replacing bin value index k with $k+1$ should only be allowed for $j = +1$ or +3. Replacing bin value index k with itself implies no frequency error, so should be done only for $j=0$.

In practice, due to frequency error not falling exactly into one of the four categories, some opportunity for "cross-fertilization" should be allowed, resulting in the following strategy:

- 1) Replace $\text{bin}(0,k)$ by the largest of
 $\text{bin}(0,k)$, $\text{bin}(-1,k-1)$ and $\text{bin}(1,k+1)$
(frequency nominal, a bit low or a bit high)
- 2) Replace $\text{bin}(1,k)$ by the largest of
 $\text{bin}(1,k)$, $\text{bin}(1,k+1)$ and $\text{bin}(3,k+2)$
(frequency more than a bit high)
- 3) Replace $\text{bin}(-1,k)$ by the largest of
 $\text{bin}(-1,k)$, $\text{bin}(-1,k-1)$ and $\text{bin}(3,k-2)$
(frequency more than a bit low)
- 4) Replace $\text{bin}(3,k)$ by the largest of
 $\text{bin}(1,k+1)$, $\text{bin}(-1,k-1)$, $\text{bin}(3,k-2)$ and $\text{bin}(3,k+2)$
(frequency very high or very low)

A person skilled in the art may devise other transition rules based on the same logic, namely that if symbol rates and radio frequency are derived at the transmitter and receiver from the same reference oscillators, then the sign of timing drift must be related to the sign of frequency error. The above transition rules thus involve less computation than finding the largest of twelve values (4 frequency errors times 3 timing drifts of early, late and nominal), but may be restricted to finding the largest of 3 or 4 values.

-21-

The use of a four-point FFT for simultaneously accumulating correlations in four different ways corresponding to different frequency error postulates may of course be extended to larger FFTs for finer resolution of frequency error. An advantage of four-point FFTs however, which are sufficient for the preferred system parameters, is that they do not require any multiplications but require only additions, which reduces the complexity of the inventive receiver according to the invention.

The above-described exemplary embodiments are intended to be illustrative in all respects, rather than restrictive, of the present invention. Thus the present invention is capable of many variations in detailed implementation that can be derived from the description contained herein by a person skilled in the art. All such variations and modifications are considered to be within the scope and spirit of the present invention as defined by the following claims.

-22-

WHAT IS CLAIMED IS:

1. A synchronization method for synchronizing a receiver with a transmitted signal, comprising the steps of:

- 5 selecting a frequency channel and receiving a signal;
 filtering, amplifying and sampling the signal to generate signal samples
for processing;
 processing said samples using a first code to detect correlation with said
first code;
10 upon detection of correlation with said first code, processing said same
signal samples using a timing identified by said detected correlation and at least one
second code to detect correlation with said at least one second code;
 upon detection of correlation with said at least one second code,
processing said same signal samples using a code related to said second code to decode
15 transmitted information; and
 testing for correct decoding of said information to verify correct
synchronization.

2. The method according to claim 1 in which said step of selecting a
20 frequency channel further comprises the step of:
 selecting said frequency channel from a prioritized channel list.

3. The method of claim 2 in which said prioritized channel list is prioritized
based on memorized historical information.

- 25 4. The method of claim 2 in which said prioritized channel list is prioritized
in order of received signal strength on each channel.

5. The method of claim 2 in which said prioritized channel list is prioritized
30 based on the channels on which synchronization was achieved most recently.

-23-

6. The method of claim 2 in which said prioritized channel list is prioritized such that channels on which synchronization has not historically been achieved are given a low priority.

5 7. The method of claim 2 in which said channel list is prioritized based on measured received signal strength on each channel and on historical information.

8. The method of claim 7 in which channels with signal strength above a threshold at which synchronization has previously been achieved are given a high
10 priority and channels with signal strength below a threshold at which synchronization has previously not been achieved are given a low priority.

9. The method of claim 1 in which said filtering, amplifying and sampling step to generate signal samples further comprises the step of:

15 analog-to-digital converting at a sampling rate of at least one sample per signaling symbol interval.

10. The method of claim 1 in which said step of processing with a first code further comprises the step of:

20 correlating a selected block of signal samples with corresponding symbols of said first code, selecting each signal sample in turn to be the start of said block.

11. The method of claim 10 in which said block correlations are performed
25 using a sliding correlator.

12. The method of claim 10 in which said block correlations are performed using a matched filter.

-24-

13. The method of claim 1 in which said transmitted signal includes a repetitive pattern with a fixed repetition period of a whole number of signaling symbols.

14. The method of claim 13 in which said step of processing to detect correlation with said first code further comprises the step of:

forming a correlation value for each alignment of said first code with a symbol position within said repetition period and accumulating said correlation values having the same alignment in successive repetition periods in a bin for each alignment.

15. The method of claim 14 further comprising the step of:
compensating said accumulation for timing drift.

16. The method of claim 15 wherein said step of compensating further comprises the step of:

periodically replacing a cumulative value by a largest of three adjacent cumulative values.

17. The method of claim 16, wherein said period is related to an accumulation time over which timing drift of the order of one signaling symbol is likely.

18. The method of claim 14 in which a minimum value over all of said bins is subtracted from all of said bins to prevent numerical growth and to form differential bin values.

19. The method of claim 18 in which detecting correlation with said first code occurs when one of said differential bin values exceeds a predetermined threshold.

20. The method of claim 19 in which a bin value exceeding said

-25-

predetermined threshold is set to zero after said detection and then accumulation in said bin is continued.

21. A method for synchronizing a receiver with a transmitted signal,

5 comprising the steps of:

selecting a frequency channel and receiving a signal;

filtering, amplifying and sampling the signal to generate signal samples
for processing;

10 processing said samples using a first code to detect correlation with said
first code; and

after detecting said correlation with said first code, continuing to process
further signal samples to detect further correlations with said first code while
processing said same further signal samples to detect a second code.

15 22. A method for synchronizing a receiver with a transmitted signal
comprising the steps of:

sequentially tuning said receiver to successive frequency channels and
measuring received signals strength on said channels;

20 forming said frequency channels into a first list for testing in a prioritized
order;

tuning said receiver to the channel in said first list with highest priority
and receiving a signal;

starting a timer to record time spent tuned to said channel and to compare
the recorded time with a time-out value;

25 filtering, amplifying and sampling the received signal to generate signal
samples for processing;

processing said signal samples using a first code to detect correlation
with said first code;

30 upon detecting correlation with said first code, recording in a second list
the timing position within said signal samples of each such detected correlation;

-26-

if said second list contains one or more entries, processing said signal samples to detect correlation with at least one second code at the corresponding recorded timing position; and

5 if said timer reaches said time-out value, retuning said receiver to the channel of next highest priority in said first list and resetting said timer.

23. A receiver for detection of synchronisation with a transmitter, comprising:

10 filtering, amplifying and conversion means for receiving signals and producing signal samples for processing;

correlation means for correlating said signal samples with a first code using time-shifts between said received signal samples and said first code and for correlating said same signal samples with at least one second code at specified time-shifts;

15 first detection means for detecting time shifts at which correlation with said first code exceeds a first threshold and recording said time-shifts in a first memory;

control means for specifying the time-shifts to said correlation means for performing correlations with said at least one second code based on the time-shifts recorded in said first memory;

20 second detection means for detecting when a correlation with said at least one second code specified by said control means exceeds a second threshold and for recording the associated at least one second code and time-shift in a second memory;

25 confirmation means for processing said same signal samples using a code based on said second code to decode information and performing a decoding error check; and

deletion means for deleting records from said second memory when said confirmation means indicates decoding error.

-27-

24. A method of synchronizing a receiver with a transmitted signal, said transmitted signal comprising a first and second repeated coded pattern having a determined repetition period, comprising the steps of:

selecting a frequency channel and receiving a signal;

5 filtering, amplifying and sampling the signal to generate signal samples for processing;

correlating said signal samples with said first coded pattern using different timing shifts in said repetition period between said first coded pattern and said signal samples to produce a first correlation value for each time shift;

10 accumulating correlation values that correspond to the same time shift in successive repetition periods in corresponding timing bins;

detecting when the cumulative value in one of said timing bins exceeds the value in another of said timing bins by more than a first threshold and recording the timing bin number in a first memory;

15 when said memory contains at least one timing bin number, correlating said same signal samples with said second repeated code pattern using timing shifts corresponding to said recorded timing bin numbers and producing corresponding second correlation values; and

20 accumulating said second correlation values in a number of second bins, each corresponding to an entry recorded in said first memory while continuing to accumulate said first correlation values in said timing bins.

25. A method for transmitting a Code Division Multiple Access signal comprising the steps of:

25 transmitting paging information having a repetitive frame structure on a given frequency using a first spread-spectrum access code, said paging information being used to address specific receivers;

transmitting traffic information to individual receivers on said same given frequency using one of a set of second spread spectrum access codes assigned to

-28-

each receiver, said traffic transmissions overlapping in time with said paging information; and

periodically transmitting a narrowband signal having substantially narrower bandwidth than said traffic and paging transmissions with a periodicity related to said repetitive frame structure.

26. The CDMA method according to claim 25 in which said step of periodically transmitting a narrowband signal further comprises the step of: transmitting a burst of unmodulated, continuous wave energy.

27. The CDMA method of claim 25 in which said periodicity has a sliding time relationship with said frame structure.

28. A method for time-synchronizing a receiver with a transmitted signal and determining a coarse frequency error estimate, comprising the steps of:

computing correlations between received signal samples and known symbols included in said transmitted signal at periodic intervals, using several time-shifts between said received signal samples and said known symbols corresponding to early and late timing postulates;

combining successive correlations corresponding to the same timing postulate using a combining method with no frequency error compensation to obtain first cumulative correlations;

combining correlations made with successively later timing postulates using a combining method compensated for a receiver frequency that is relatively high compared to the transmitted signal frequency to obtain second cumulative correlations;

combining correlations made with successively earlier timing postulates using a combining method compensated for a receiver frequency that is relatively low compared to the transmitted signal frequency to obtain third cumulative correlations; and

-29-

determining the largest of said first, second and third correlations to determine a timing and a coarse frequency error estimate.

1/6

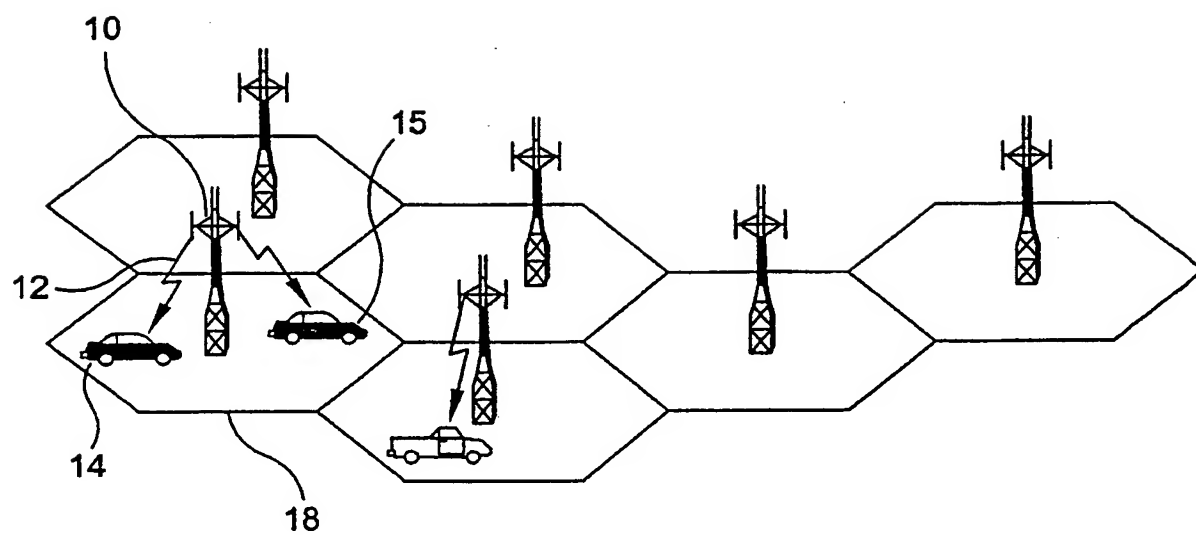


Fig. 1

2/6

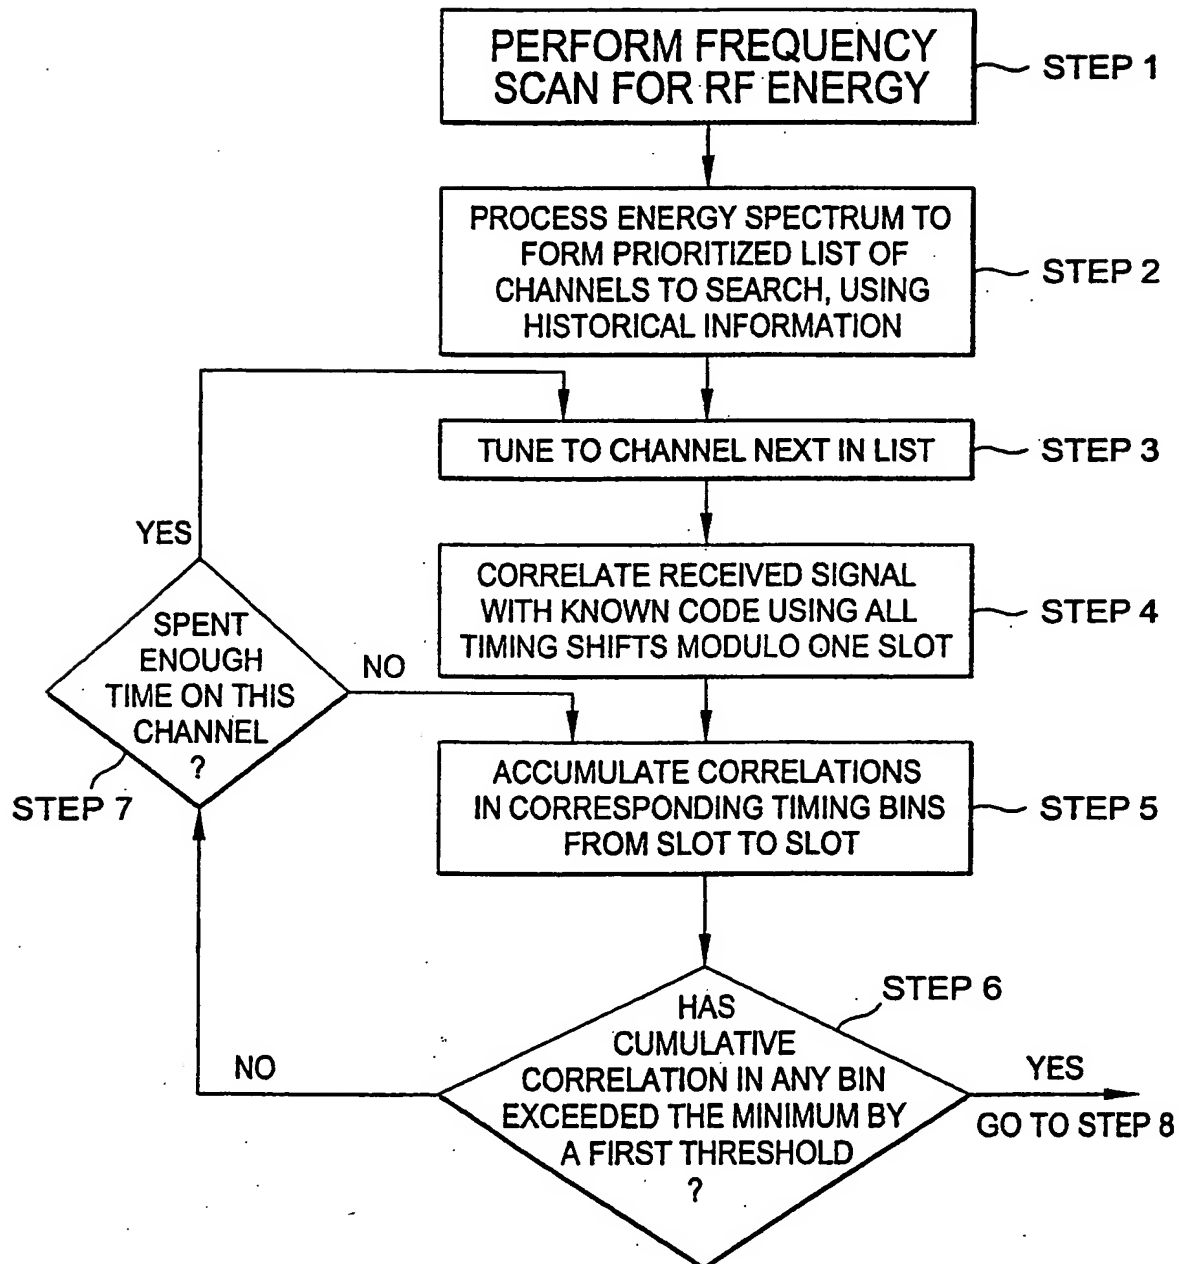


Fig. 2(a)

3/6

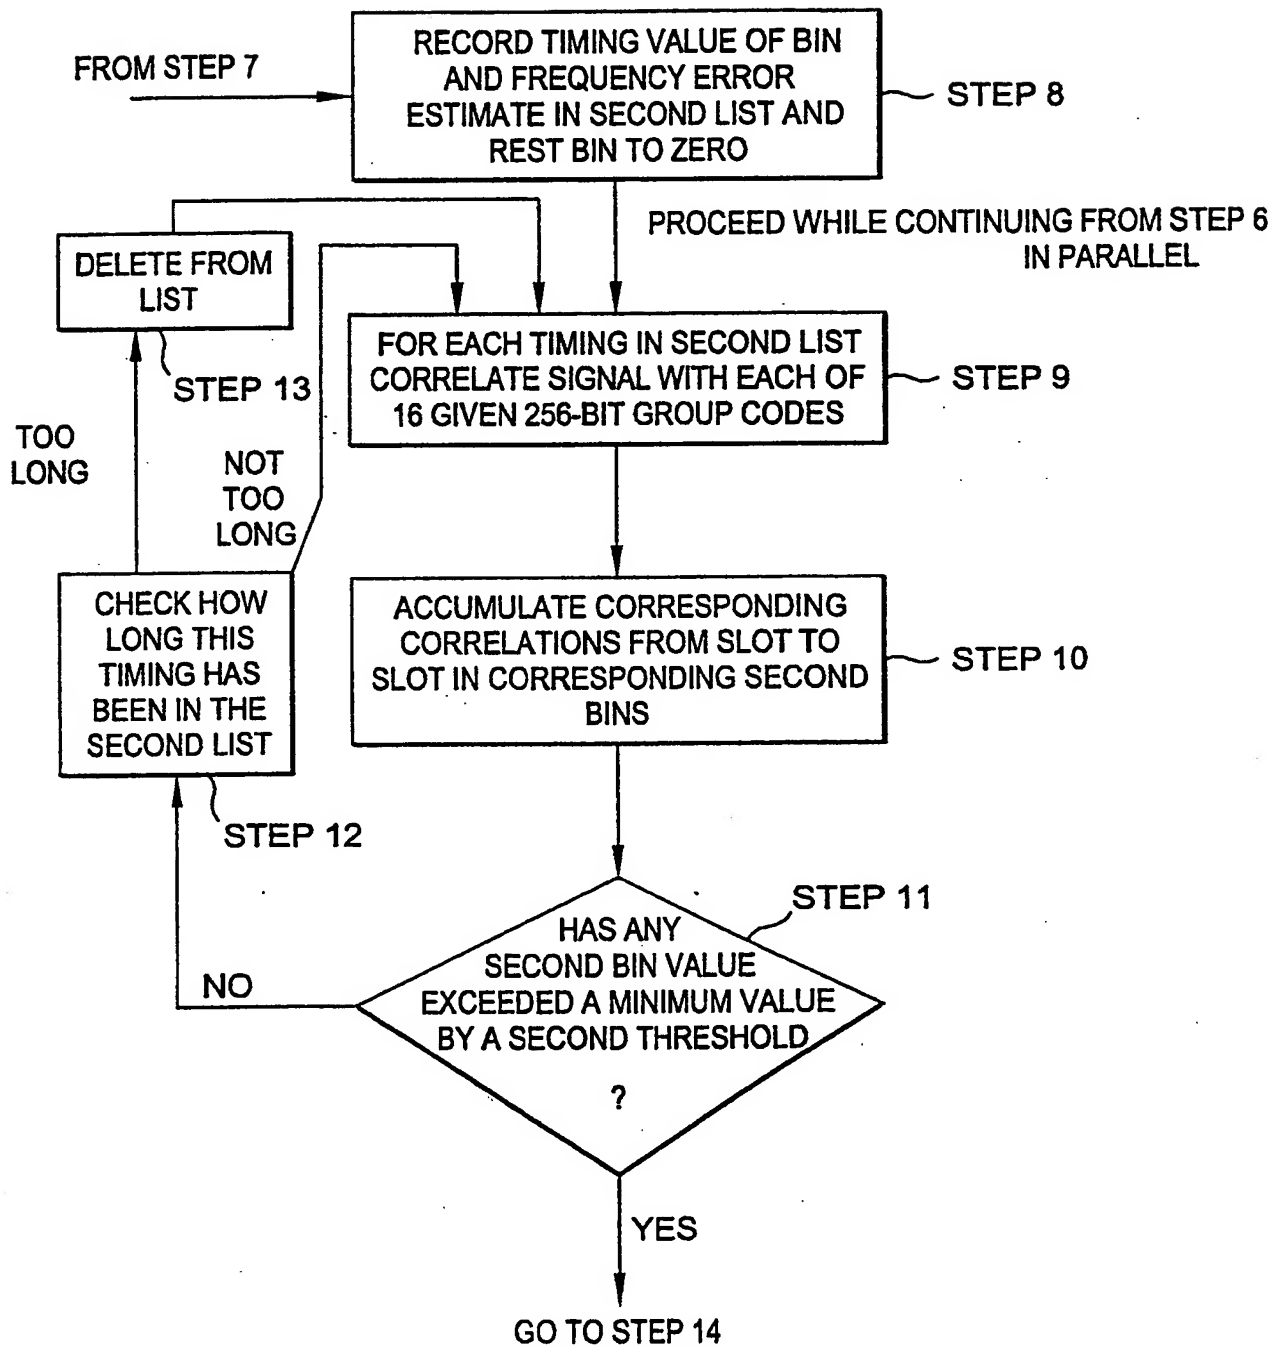


Fig. 2(b)

4/6

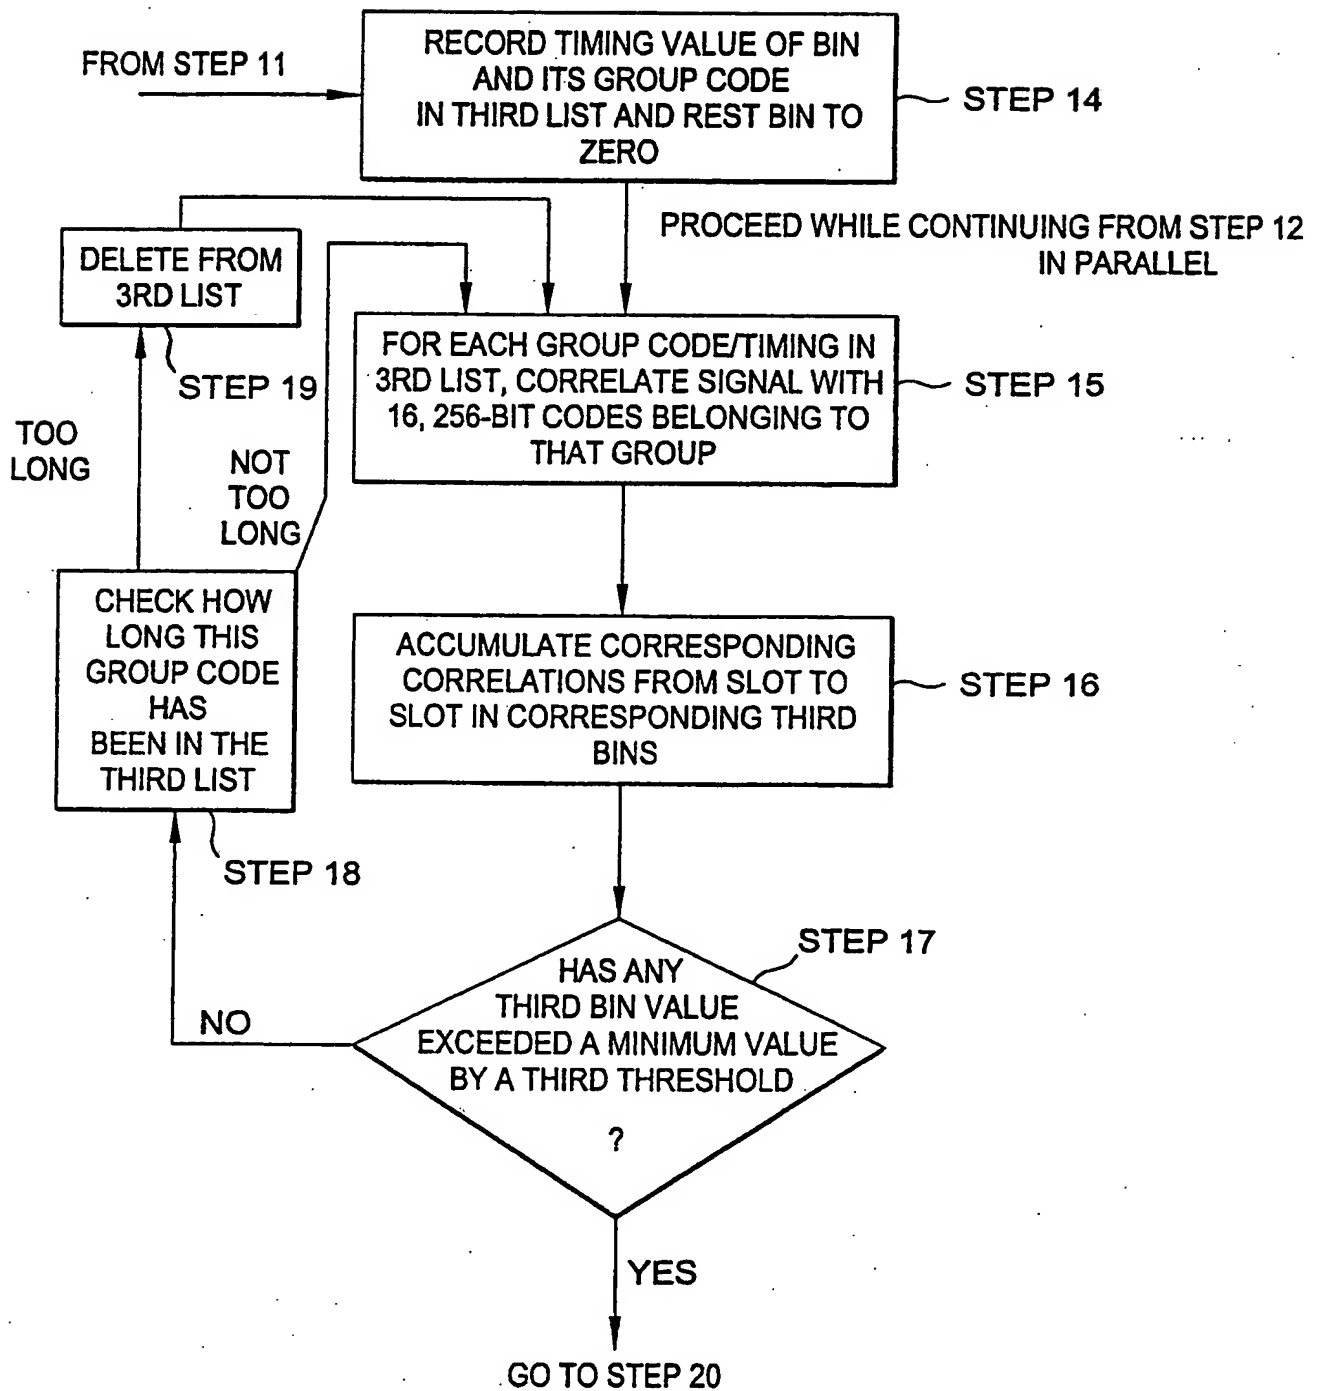


Fig. 2(c)

5/6

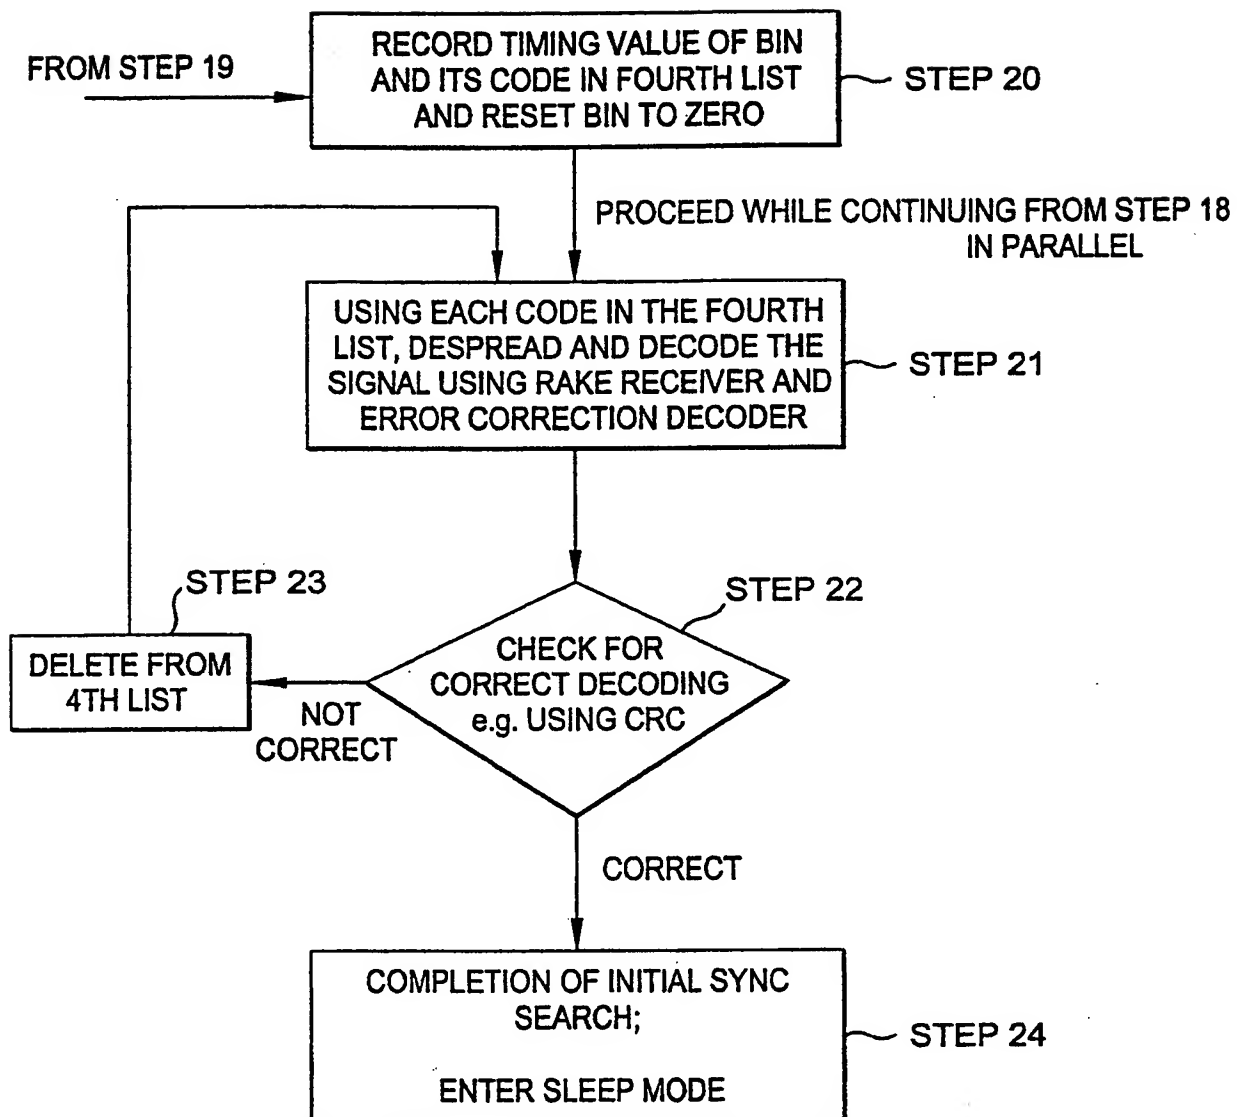


Fig. 2(d)

6/6

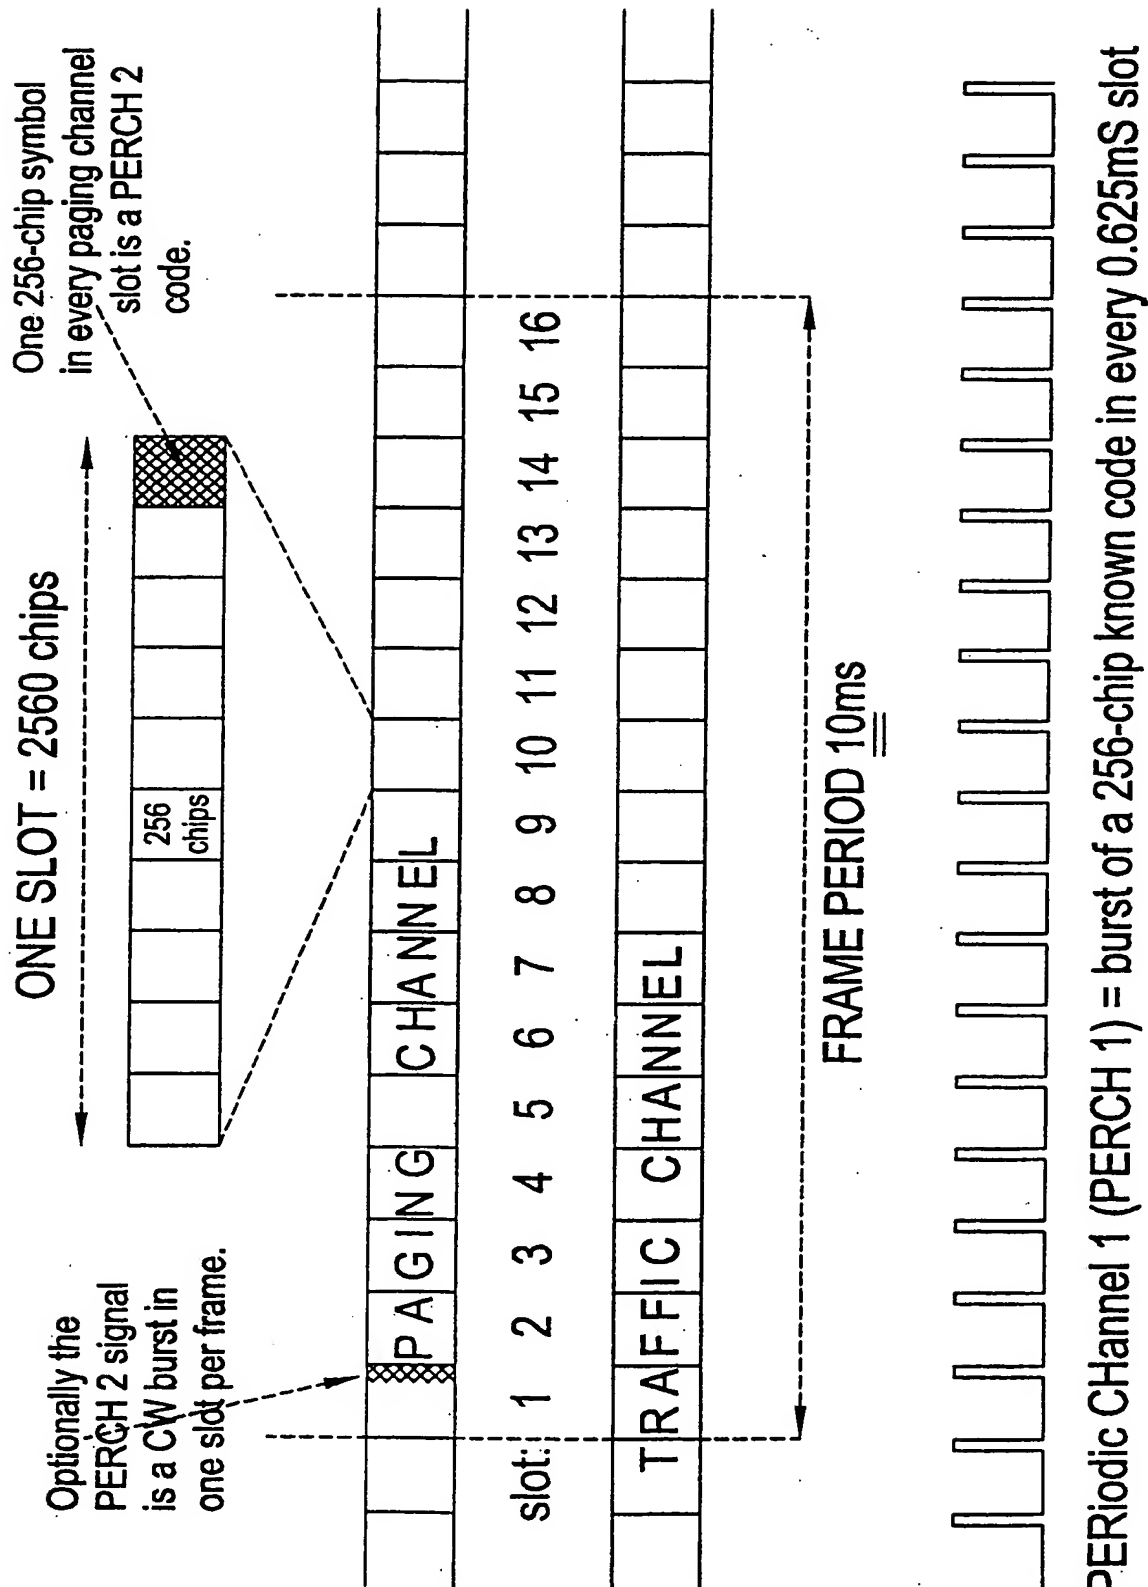


Fig. 3

THIS PAGE BLANK (USPTO)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 July 2000 (27.07.2000)


PCT

(10) International Publication Number
WO 00/44117 A3

- (51) International Patent Classification⁷: H04B 1/707, 7/26, H04L 27/233
- (21) International Application Number: PCT/US00/00482
- (22) International Filing Date: 18 January 2000 (18.01.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/236,083 25 January 1999 (25.01.1999) US
- (71) Applicant: ERICSSON, INC. [US/US]; 7001 Development Drive, Research Triangle Park, NC 27709 (US).
- (72) Inventor: DENT, Paul, W.; 637 Eaglepoint Road, Pittsboro, NC 27312 (US).
- (74) Agent: DUBOIS, Steven, M.; Burns, Doane, Swecker & Mathis L.L.P., P.O. Box 1404, Alexandria, VA 22313-1404 (US).
- (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MULTI-STAGE CDMA SYNCHRONIZATION WITH PARALLEL EXECUTION

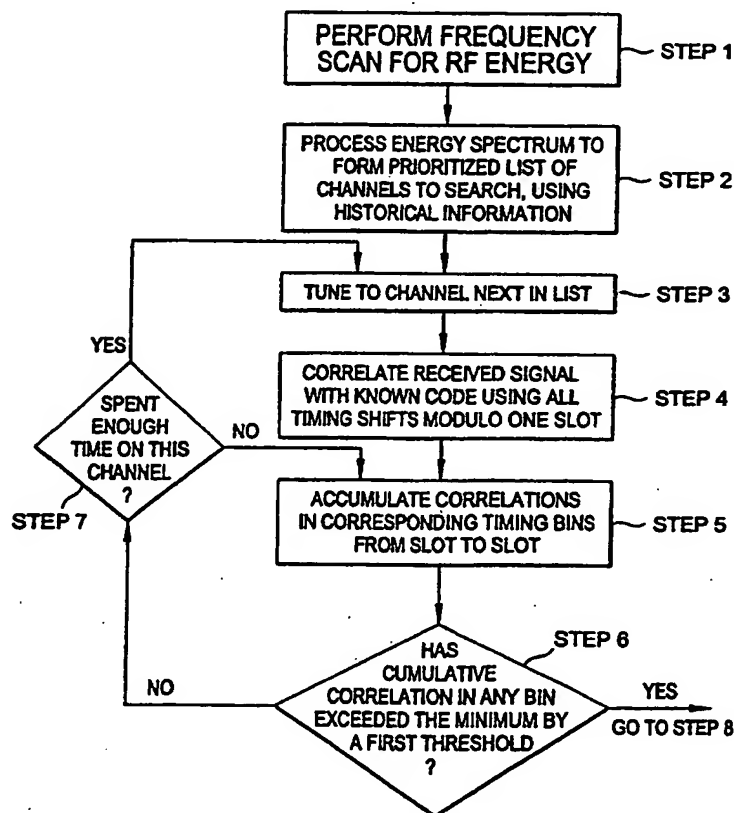

(57) Abstract: Methods and systems for time synchronizing a receiver to a spread spectrum signal are described. Exemplary embodiments of the present invention provide for at least a two step process in which, at a first step, a number of candidate synchronization frequencies or timings are identified, followed by confirming one of the candidates as a correct synchronization state at a second or final step. According to the present invention, the confirmation step may be performed at the same time as the step of identifying further candidates by processing the same received signal samples in different ways.

WO 00/44117 A3



Published:

— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:
7 December 2000

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/00482

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04B1/707 H04B7/26 H04L27/233

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, INSPEC, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 825 737 A (NIPPON TELEGRAPH & TELEPHONE) 25 February 1998 (1998-02-25) column 4, line 7 -column 8, line 8 column 24, line 7-46 figures claims	1-24
A	WO 98 47238 A (NORTHERN TELECOM LTD ;ALAMI SAMIR (US); CHANG KIM (US)) 22 October 1998 (1998-10-22) abstract page 12, line 15 -page 13, line 9 page 17, line 3-28 page 19, line 19 -page 20, line 9 page 23, line 3 -page 24, line 32 figures -/-	22

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

14 August 2000

Date of mailing of the international search report

29. 08. 2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Dejonghe, O

INTERNATIONAL SEARCH REPORT

Inter: onal Application No
PCT/US 00/00482

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 729 571 A (KIM JE-WOO ET AL) 17 March 1998 (1998-03-17) the whole document	1-24
A	----- FUKASAWA A ET AL: "WIDEBAND CDMA SYSTEM FOR PERSONAL RADIO COMMUNICATIONS" IEEE COMMUNICATIONS MAGAZINE,US,IEEE SERVICE CENTER. PISCATAWAY, N.J, vol. 34, no. 10, 1 October 1996 (1996-10-01), pages 116-123, XP000694488 ISSN: 0163-6804 page 117, left-hand column, line 1 -right-hand column, line 20 figure 2	25
A	----- DAHLMAN E ET AL: "UMTS/IMT-2000 BASED ON WIDEBAND CDMA" IEEE COMMUNICATIONS MAGAZINE,US,IEEE SERVICE CENTER. PISCATAWAY, N.J, vol. 36, no. 9, 1 September 1998 (1998-09-01), pages 70-80, XP000784828 ISSN: 0163-6804 page 73, right-hand column, line 1 -page 74, right-hand column, line 52 page 75, left-hand column, line 39 -right-hand column, line 17 page 77, left-hand column, line 31 -right-hand column, line 5 figure 11	25
A	----- US 5 758 288 A (FEUERSTEIN MARTIN JAY ET AL) 26 May 1998 (1998-05-26) column 2, line 42-56	25
A	----- US 5 828 662 A (KRZYMIEN WITOLD ET AL) 27 October 1998 (1998-10-27) claim 1	25
A	----- WO 99 00912 A (ERICSSON TELEFON AB L M) 7 January 1999 (1999-01-07) the whole document	25
A	----- US 5 825 835 A (KINGSTON SAMUEL C ET AL) 20 October 1998 (1998-10-20) column 1, line 41-57	26
A	----- WO 98 35458 A (AT & T WIRELESS SERVICES INC) 13 August 1998 (1998-08-13) page 9, line 9-19 page 10, line 14 -page 13, line 4	28
	----- -/-	

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 00/00482

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 544 155 A (MEGE PHILIPPE ET AL) 6 August 1996 (1996-08-06) column 1, line 36-59 column 2, line 18-42 column 2, line 46 -column 3, line 59 claims	28
A	GB 2 287 613 A (ROKE MANOR RESEARCH) 20 September 1995 (1995-09-20) the whole document	28
A	US 5 805 584 A (KINGSTON SAMUEL C ET AL) 8 September 1998 (1998-09-08) column 1, line 42-62 column 11, line 63 -column 13, line 33	28

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 00/00482

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-24

method for fast timing acquisition in a CDMA communication system

2. Claims: 25-27

method for transmitting a CDMA signal

3. Claim : 28

method for coarse frequency error estimation in a CDMA communication system

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. Application No

PCT/US 00/00482

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0825737 A	25-02-1998	CA 2217575 A WO 9733400 A	12-09-1997 12-09-1997
WO 9847238 A	22-10-1998	AU 6969598 A DE 19882318 T EP 0983701 A	11-11-1998 13-04-2000 08-03-2000
US 5729571 A	17-03-1998	KR 9705598 B	18-04-1997
US 5758288 A	26-05-1998	US 5600706 A US 5295180 A FI 946147 A PL 306687 A CA 2083791 A EP 0568824 A JP 6105364 A	04-02-1997 15-03-1994 30-06-1995 10-07-1995 09-10-1993 10-11-1993 15-04-1994
US 5828662 A	27-10-1998	AU 7558296 A WO 9749201 A EP 0906671 A	07-01-1998 24-12-1997 07-04-1999
WO 9900912 A	07-01-1999	US 5991330 A AU 7947698 A EP 0992122 A	23-11-1999 19-01-1999 12-04-2000
US 5825835 A	20-10-1998	AU 1964697 A BR 9707685 A CN 1216180 A EP 0882330 A WO 9731429 A	10-09-1997 04-01-2000 05-05-1999 09-12-1998 28-08-1997
WO 9835458 A	13-08-1998	US 5943375 A US 5914981 A US 6084932 A WO 9835455 A	24-08-1999 22-06-1999 04-07-2000 13-08-1998
US 5544155 A	06-08-1996	FR 2706709 A AT 179038 T CA 2125831 A DE 69417803 D DE 69417803 T EP 0630120 A ES 2131648 T FI 942831 A GR 3030478 T JP 7050651 A	23-12-1994 15-04-1999 17-12-1994 20-05-1999 18-11-1999 21-12-1994 01-08-1999 17-12-1994 29-10-1999 21-02-1995
GB 2287613 A	20-09-1995	NONE	
US 5805584 A	08-09-1998	AU 1838597 A BR 9707688 A CN 1217101 A EP 0882329 A JP 2000505611 T US 5903551 A WO 9731428 A	10-09-1997 27-07-1999 19-05-1999 09-12-1998 09-05-2000 11-05-1999 28-08-1997